Order of cover screw tightening

During installation, torque the door evenly and tighten the screws in the order shown in the figure to prevent water intrusion.
Tighten the screws temporarily in the order of (1) through (6), and then tighten them again in the order of (7) through (12).

Tightening torque: 1.2 N-m

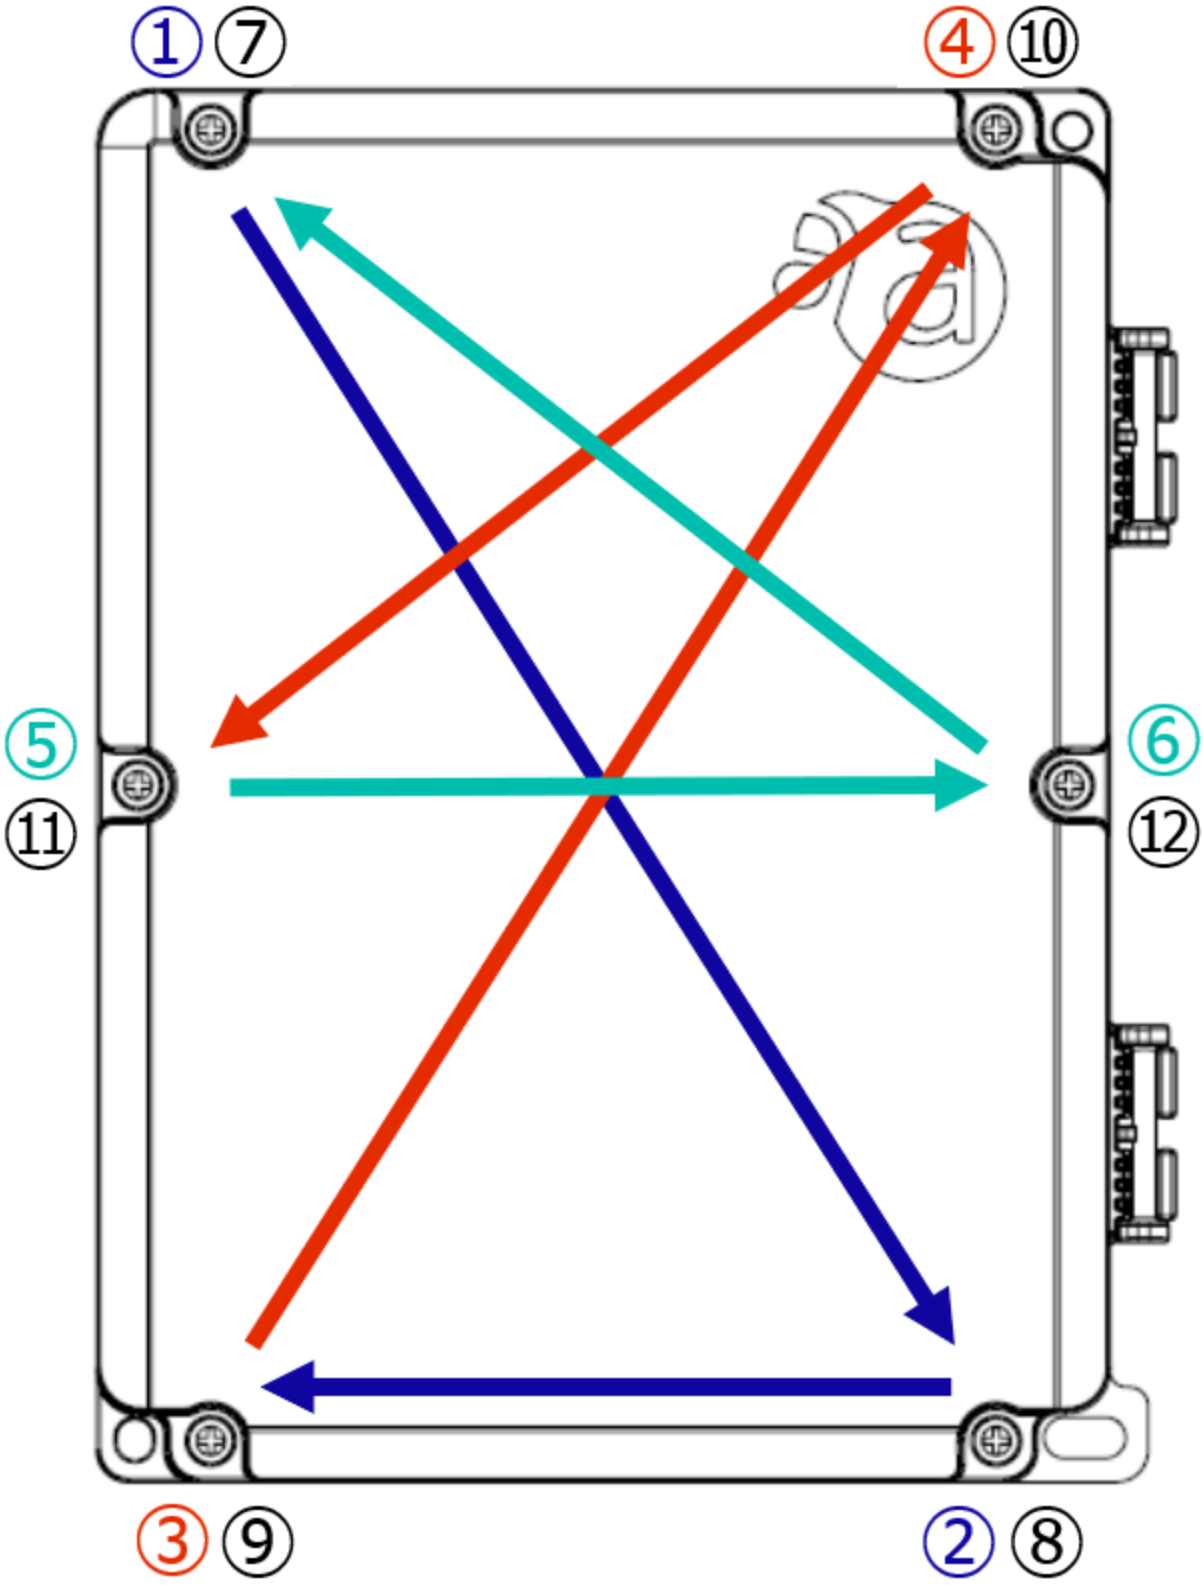
1
7
4
10
5
11
6
12
3
9
2
8