Configure package repositories

Advanced Settings · https://manual.amnimo.com/en/docs/advanced-settings/configure-package-repositories/

NOTE

You must be signed in as an administrator to use this feature. Compact routers (amnimo C series) do not have this feature.


Since this product uses a package management system, each application can be updated from the package repository.

This section describes operations for adding, editing, and deleting package repositories.

List package repositories

Displays a list of package repositories.

From the side menu, click Advanced Configuration and Control - Package Repository Settings.
The "Package Repository Settings" screen displays a list of registered package repositories.

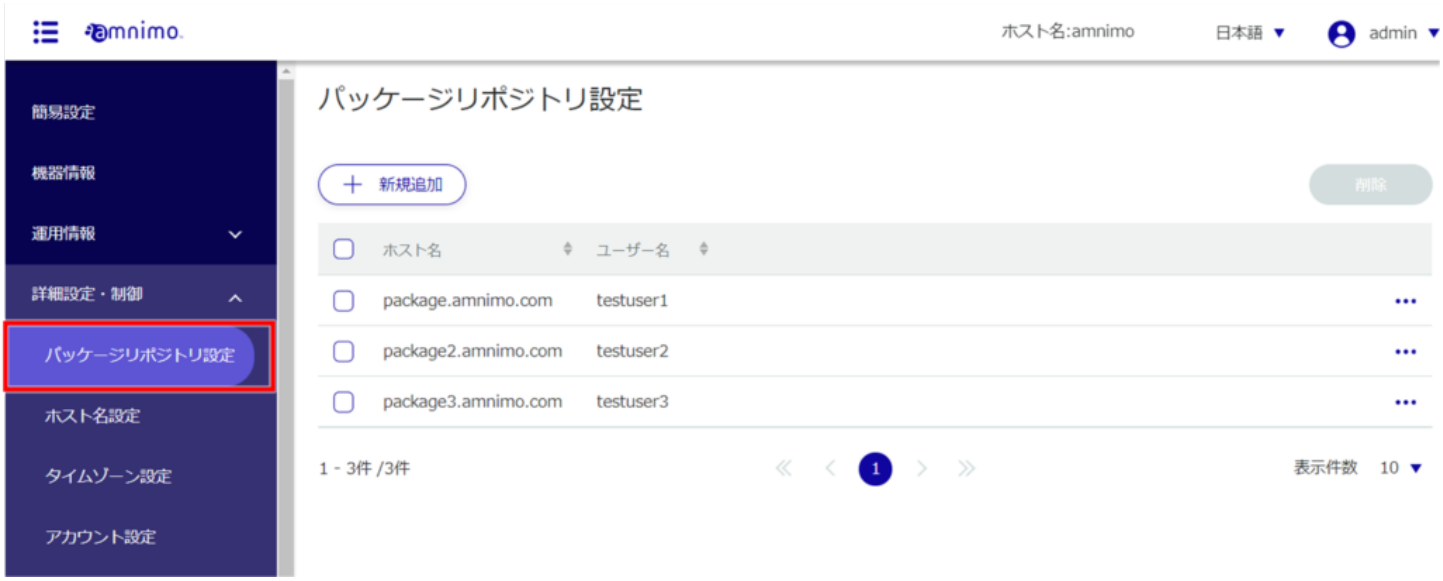

NOTE


By clicking "Host Name" or "User Name" in the package repository list, you can sort the package repositories in descending/ascending order by host name or user name.



Add package repositories

Add a new package repository.

On the "Package Repository Settings" screen, click the [Add New] button.

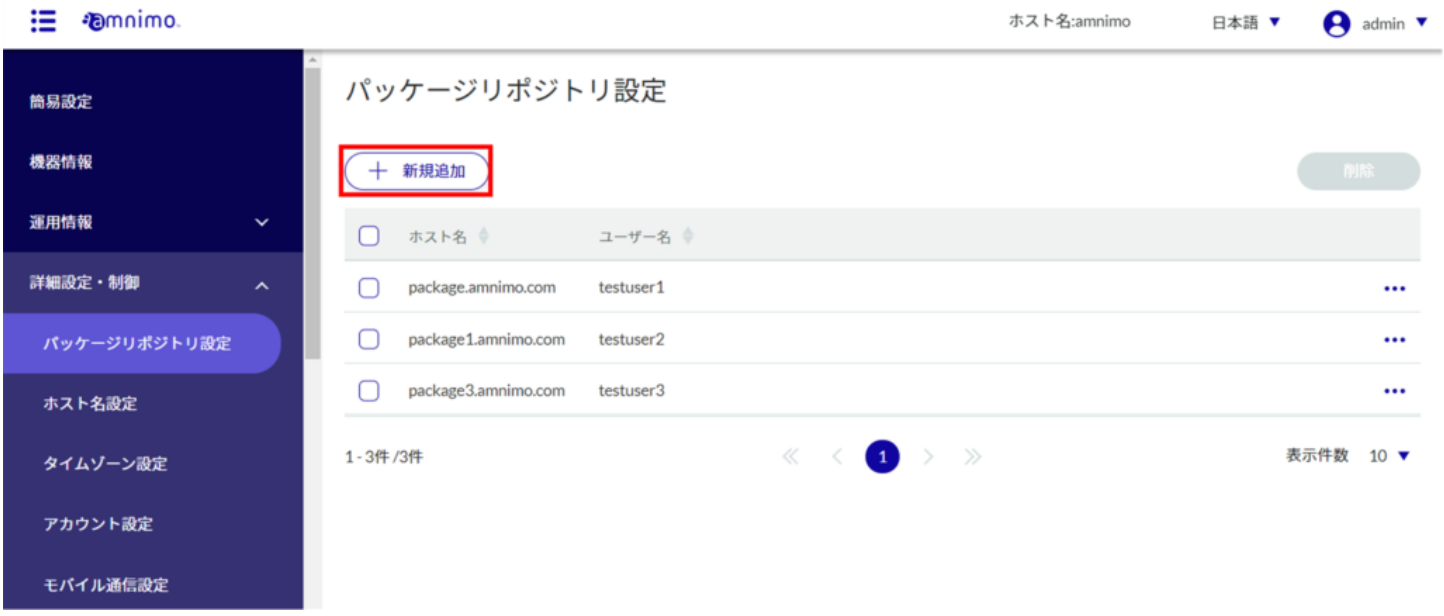

The "Add Package Repository" screen will appear.

Configure the following settings (1) to (3) below and click [Setup].

❶ Enter a host name.

Enter the user name to use the host entered in ❶.

❸ Enter the password for the user name entered in ❷.



The package repository is added.



Edit the package repository

Edit information on registered package repositories.

On the "Package Repository Settings" screen, click [...] to the right of the package repository you wish to edit and select [Edit] from the operation menu that appears.



The "Edit Package Repository Settings" screen will appear.

Edit the package repository information and click the Configure button.



The package repository information is updated and the list of package repositories is displayed.




Delete package repositories

There are two ways to delete registered package repositories: individually from the package repository operation menu, or by selecting all package repositories to be deleted and then deleting them.

Delete individual package repositories

This is the method of selecting deletion from the operations menu of the package repository.

On the "Package Repository Settings" screen, click [...] to the right of the package repository you wish to delete and select [Delete] from the operation menu that appears.

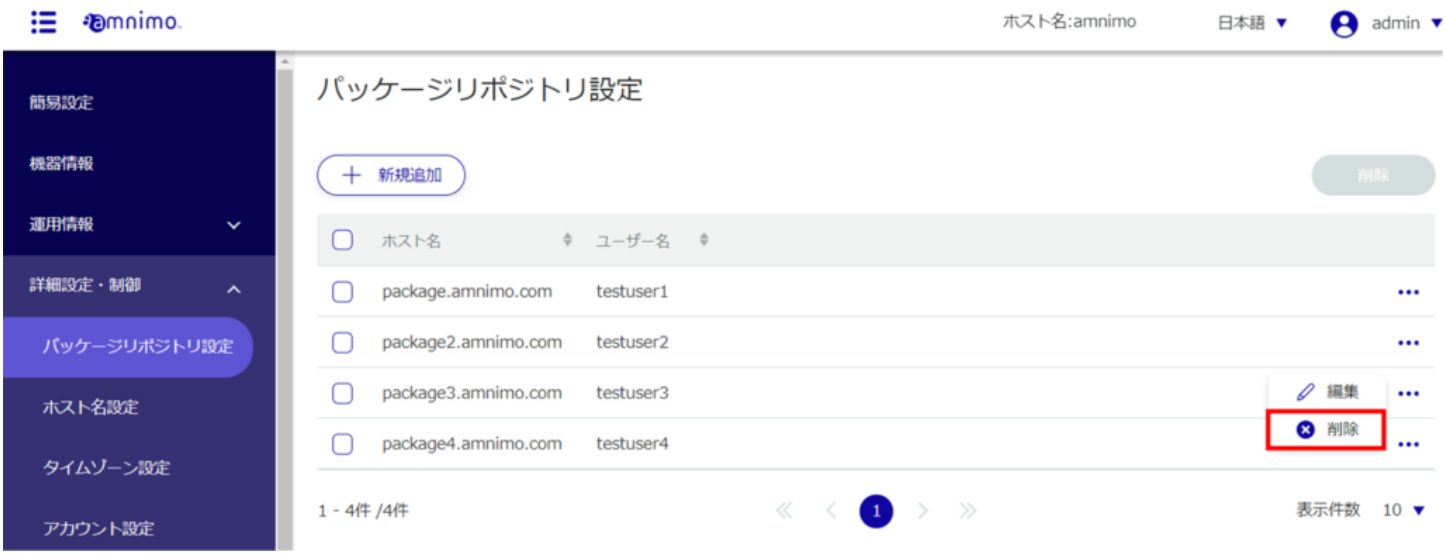

The "Confirmation" screen appears.

Click the [Delete] button.




The package repository is deleted.

Select and delete multiple package repositories

This method is used to check the package repositories you wish to delete before deleting them. This is useful when deleting multiple package repositories at once. You can also select a single package repository to delete.

On the "Package Repository Settings" screen, click the checkbox to the left of the package repository you wish to delete, place a checkmark in the checkbox, and click the [Delete] button.

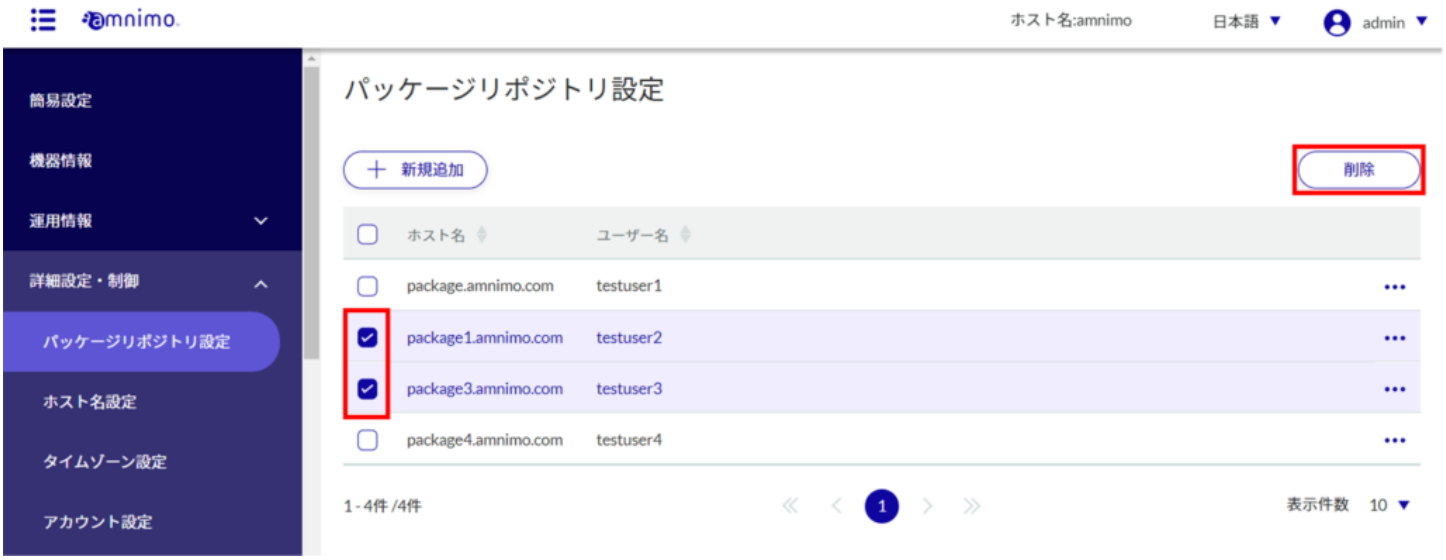

The "Confirmation" screen appears.

Click the [Delete] button.



The selected package repository is deleted.